


A Compilation of Selected Data on Solar Radiation at Sea Level

> Assignment 91 195 Technical Memorandum 3/67 February 1967

> > By B. H. Morgan


U.S. NAVY MARINE ENGINEERING LABORATORY

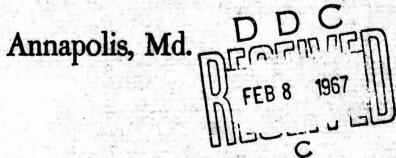

Dedicated To PROGRESS IN MARINE ENGINEERING

Distribution of this document is unlimited.

ARCHIVE COPY



DEDICATED TO PROGRESS IN MARINE ENGINEERING

The Marine Engineering Laboratory is charged with the discovery of fundamental knowledge, the development of new and unique equipment to meet and anticipate new naval requirements, analysis of Fleet machinery failures, and evaluation of pretotypes to insure high performance and reliability in the Fleet. Dedicated to progress in naval engineering, the Marine Engineering Laboratory contributes to the technical excellence and auperiority of the Navy today - and tomorrow.



ANY MATTERS OF COMMERCIAL CONFIDENCE INCLUDED IN THIS REPORT MUST BE TREATED WITH DUE REGARD FOR THE SAFEGUARDING OF PROPRIETARY INTERESTS.

THE INFORMATION CONTAINED HEREIN SHALL NOT BE USED FOR ADVERTISING PURPOSES.

THIS REPORT HAS BEEN MACHINE ASSEMBLED. IF ANY PAGES ARE MISSING, PLEASE REQUEST FROM MEL.

A Compilation of Selected Data on Solar Radiation at Sea Level

of a school and a sec

Technical Memorandum 3/67 February 1967

> By B. H. Morgan

15. H. Morgan

B. H. MORGAN

Associate Professor, USNA

Reviewed by:

M. GREENBERG

Project Engineer 6

Approved by:

H. V. NUTT

Technical Director

Property of the second second

er a profit by the first of

อาการเหลือ ระบบการเกาะ

7-7 21-109

ABSTRACT

A spectral distribution curve of solar irradiance at sea level, over the range of 0.3 to 15.0 microns, is presented. This curve was developed from data compiled by Moon in 1940, high altitude solar irradiance measurements reported by Johnson in 1954, and atmosphere transmission measurements reported by Gebbie, et al, in 1951.

MEL Technical Memorandum 3/67

ADMINISTRATIVE INFORMATION

The data presented was compiled under MEL Assignment 91 195, Sub-project S-F010 03 01, Task 9292.

TECHNICAL REFERENCES

- 1 Moon, P., "Proposed Standard Curve for Engineering Use,"
 J. Franklin Inst. Vol. 230, No. 5, Nov 1940, pp. 583-617
- 2 Johnson, F.S., "The Solar Constant," J. Meteor, Vol. 11, No. 6, Dec 1954, pp. 431-439
- 3 Gebbie, H.A., W.R. Harding, C. Hilsun, A.W. Pryce, and V. Roberts, "Atmospheric Transmission in the 1 to 14 Micron Region," Proc. Roy. Soc., Vol. A206, London 1951, p. 87

MEL Technical Memorandum 3/67

TABLE OF CONTENTS

	Page
DISTRIBUTION LIST	ii
ABSTRACT	iii
ADMINISTRATIVE INFORMATION	iv
TECHNICAL REFERENCES	iv
INTRODUCTION	1
SOLAR IRRADIANCE	1
Moon's Data	1
Johnson's Data	2
Developed Moon-Johnson Data	2
Developed Johnson-Gebbie Data	2
DISCUSSION OF DEVELOPED DATA	2
Comparison of Environmental Conditions	2
Comparison of Data Consistency	7
LIST OF FIGURES	48
Figure 1-2 - Curves, Solar Irradiance at Sea Level	

A COMPILATION OF SELECTED DATA ON SOLAR RADIATION AT SEA LEVEL

1.0 INTRODUCTION

Many investigators have made measurements of solar irradiance outside the earth's atmosphere and at sea level. No one authoritative source of data, however, covers the entire spectral range from 0.3 to 15.0 microns. In order to construct a complete solar irradiance curve for sea level, it was necessary to examine existing data, resolve differences, and correct for revised values of the solar constant and atmosphere transmission factors. This compilation of solar irradiance data is a by-product of a broader study aimed at meeting the U.S. Navy's need for knowledge of the surface characteristics of material and their interaction with electromagnetic radiation. This compilation provides a readily usable basis for calculating solar heating effects on surfaces having different solar absorbing characteristics.

2.0 SOLAR IRRADIANCE

2.1 Moon's Data. In 1940, existing solar irradiance data were correlated in a classic paper by Parry Moon. In his paper, Moon pointed out that the energy received at the earth's surface from the sun is subject to wide variation because of several factors. There is a variation of ± 3.5 percent due to the changing distance between the earth and sun, and about ± 1.5 percent due to variation in the sun itself. In addition, the degree of atmposheric scattering (by air molecules, water vapor, and dust) and absorption (by molecules of 0, 0, Ho, Co, etc) is highly variable. Moon's principal result is a table of spectral solar irradiance at sea level for an air mass of two (m = 2, Zenith distance about 60°). Moon also presented spectral irradiance data at sea level for other zenith distances and for outside the atmosphere.

¹Superscripts refer to similarly numbered entries in the Technical References at the beginning of this memorandum.

- 2.2 Johnson's Data. In 1954, F.S. Johnson revised Moon's outside—the-atmosphere data, using new data obtained by the Naval Research Laboratory in the wavelength range from 0.22 to 0.60 micron.² Johnson concluded that Moon's data outside—the—atmosphere were still the best available for wavelengths longer than 0.60 micron, but that they should be increased by 2.8 percent because of revision of the basic Smithsonian data used in determining the solar constant (total solar irradiance outside the earth's atmosphere).
- 2.3 <u>Developed Moon-Johnson Data</u>. For wavelengths shorter than 0.60 micron, Moon's data for spectral irradiance at sea level have been revised to correspond with Johnson's 1954 outside- the -atmosphere data, by multiplying Moon's sea level values for each wavelength by the ratio of the irradiance outside the atmosphere as given by Johnson to that as given by Moon, at the same wavelength.

For wavelengths from 0.6 to 1.8 microns, Moon's sea-level values are increased by 2.8 percent, as suggested by Johnson, to compensate for a revision in the solar constant.

- 2.4 <u>Developed Johnson-Gebbie Data</u>. For wavelengths greater than 1.8 microns, Johnson's outside-the-atmosphere values (which are those of a 6000 K* gray body) were multiplied by the transmittance of a one-mile path at sea level as measured by Gebbie, et al, in 1951 3.
- 3.0 DISCUSSION OF DEVELOPED DATA
- 3.1 Comparison of Environmental Conditions. The air path used by Gebbie had a visual transmittance, at 0.61 micron, of 60 percent and 17-mm precipitable water vapor, while Moon assumed 20-mm precipitable water vapor. Moon's data indicates a transmittance of 68 percent, at 0.61 micron. The resultant curve for solar spectral irradiance at sea level appears in the following tabulation and is plotted in Figures 1 (0.3 to 1.8 microns) and 2 (1.8 to 15 microns).

^{*}Abbreviations used in this text are from the GPO Style Manual, 1959, unless otherwise noted.

Solar Spectral Irradiance at Sea Level

The mean spectral irradiance, H_{λ} , for air mass two (corresponding to elevation of the sun above the horizon of about 30°) is given in watts-m-2-micron-1 as a function of wavelength, $_{\lambda}$, for a surface perpendicular to the sun's rays. Moon-Johnson data is headed M-J: Johnson-Gebbie data is headed J-G.

λ microns	H _λ W-m-s -μ-1	λ microns	' H _λ W-m-s -μ-1
	<u>M-J</u>		M-J
0.30	0.11	0.55	1235
0.31	13.6	0.56	1207
0.32	63.2	0.57	1197
0.33	146	0.58	1201
0.34	196	0.59	1190
0.35	242	0.60	1199
0.36	277	0.61	1201
0.37	355	0.62	1198
0.38	369	0.63	1209
0.39	370	0.64	1208
0.40	555	0.65	1206
0.41	7 55	0.66	1199
0.42	797	0.67	1192
0.43	783	0.68	1181
0.44	954	0.69	1005
0.45	1087	0.70	1139
0.46	1113	0.71	1100
0.47	1115	0.72	855
	1202		
0.48		0.73	992
0.49	1145	0.74	1070
0.50	1 167	0.75	891
0.51	1182	0.76	582
0.52	1147	0.77	995
0.53	1212	0.78	932
0.54	1252	0.79	949
	>-		

à microns	1 Hy M-m-s -"-1	λ microns	1 H _λ W-m-2-μ-1
0.00	<u>M-J</u>	3.30	<u>M-J</u>
0.80	881	1.10	259
0.81	718	1.11	130
0.82	823	1.12	71.8
0.83	887	1.13	101
0.84	882	1.14	169
0.85	862	1.15	222
0.86	836	1.16	279
0.87	820	1.17	337
0.88	631	1.18	356
0.89	531	1.19	354
0.90	493	1.20	383
0.91	386	1.21	413
0.92	265	1.22	443
0.93	174	1.23	432
0.94	286	1.24	398
0.95	501	1.25	337
0.96	600	1.26	320
0.97	651	1.27	3 92
0.98	663	1.28	393
0.99	661	1.29	356
1.00	648	1.30	271
1.01	637	1.31	214
1.02	627	1.32	173
1.03	618	1.33	118
1.04	609	1.34	59 • 7
1.05	566	1.35	18.6
1.06	541	1.36	0.68
1.07	534	1.37	0.0
1.08	526	1.38	0.0
1.09	528	1.39	0.0
,	7		

λ microns	' H _λ W-m-s -μ-1	λ microns	1	H _λ W-m-s -μ-1
	<u>-J</u>	_	M-J	
1.40	0.0	1.70		136
1.41	1.96	1.71		127
1.42	3.82	1.72		118
1.43	7.74	1.73		108
1.44	14.1	1.74		99.8
1.45	24.5	1 .7 5		82.4
1.46	31.4	1.76		60.5
1.47	46.4	1.77		39.9
1.48	86.0	1.78		18.9
1.49	132	1.79		5.86
1.50	161	1.80		0.95
1.51	19 2	1.00		
1.52	215			
1.53	223		J-G	
			0 -0	
1.54	232			
1.55	227	1.40		0
1.56	223	1.45		62
1.57	219	1.50		142
1.58	215	1.55		179
1.59	211	1.60		174
1.60	208	1.65		160
1.61	204	1.70		144
1.62	199	1 .7 5		123
1.63	194	1.80		77
1.64	189	1.85		O
1.65	178	1.9		5
1.66	168	2.0		54
1.67	163	2.1		5 54 69
1.68	149	2.2		62
1.69	143	2.3		
1.09	147	E + ,)		53

MEL Technical Memorandum 3/67

λ microns	1 H _λ W-m-s -μ-1	λ microns	H ^y M-m-s- ^h -1
2.4 2.5 2.6	J-G 36 13 0.0	4.9 5.0 5.1	1.8 1.13 0.78
2.7	0.0	5.2 5.3	0.36 0.14
2.9 3.0 3.1 3.2 3.3	3.0 6.2 4.1 8.6 6.3	7.6 8.0 8.5	0.00 0.06 0.19 0.37
3.4 3.5 3.6 3.7 3.8	11.7 13.8 12.2 11.3 10.1	9.0 9.5 10.0 10.5 11.0	0.33 0.29 0.23 0.18 0.15
3.9 4.0 4.1 4.2 4.3	9.6 8.7 7.3 0.8 0.0	11.5 12.0 12.5 13.0 13.5	0.11 0.10 0.06 0.05 0.02
4.4 4.5 4.6 4.7 4.8	0.0 1.8 3.1 3.2 2.4	14.0 14.5 15.0	0.00 0.00 0.00

The values given are for an air mass of two (sun's zenith distance about 60°) and for a surface perpendicular to the sun's rays. Scattered solar-radiation coming from the sky is not included.

3.2 Data Consistency. As a test of the consistency of the resulting Johnson-Gebbie data with that from Moon, both curves are plotted together in the range from 1.4 to 1.9 microns, Figure 1. They are reasonably consistent with one another, particularly with respect to their intergrals, the area under the Johnson-Gebbie curve being the larger by about 5 percent. However, at shorter wavelengths not plotted, the Johnson-Gebbie combination falls considerably below the Moon-Johnson curve, at least near the peaks.

The data presented in this memorandum was developed in order that numerical calculations of solar heating effects on surfaces of known radiant characteristics, at sea level, could be carried out. The main purpose was to develop a procedure for performing such calculations, and this was to be done in a rather short period of time. Consequently, sources and methods that were readily available and easily carried out were used to obtain the data presented here, as described in Section 2, and no analysis of its probable accuracy was attemped.

USN
MARINE ENGINEERING LABORATORY

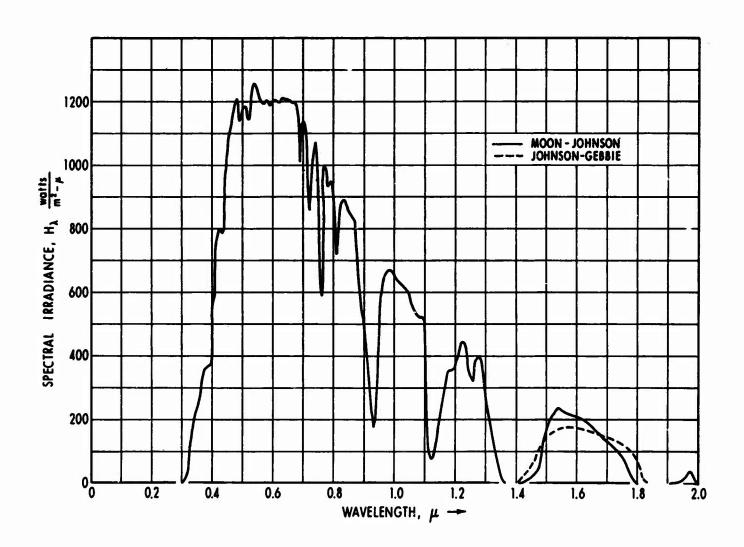


Figure 1
Solar Irradiance at Sea Level

The feature of

USN MARINE ENGINEERING LABORATORY

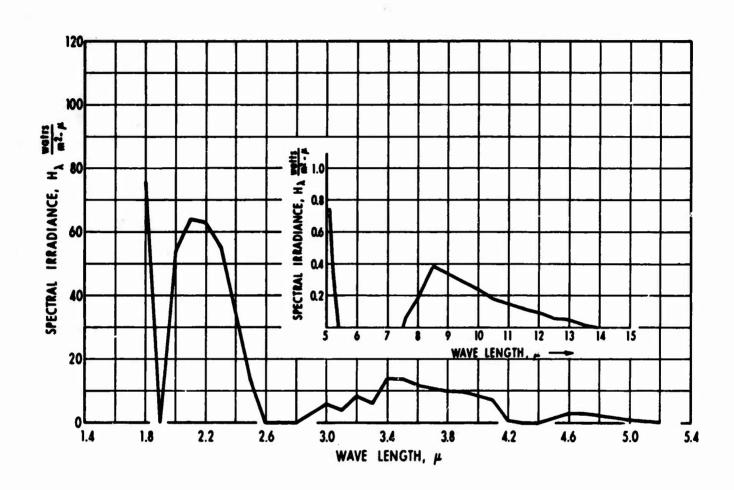


Figure 2
Solar Irradiance at Sea Level

Security Classification Unclassif			Challer To 12	
DOCUMENT CONT				
(Security classification of title, body of abatract and indexing a 1. ORIGINATING ACTIVITY (Corporate author)	mnotation must be e		CURITY CLASSIFICATION	
U. S. Navy Marine Engineering Labo	oratory	Unclas	sified	
Annapolis, Maryland	-	26. GROUP	n en	
A Compilation of Selected Data on	Solar Rad	liation	at Sea Level	
4. DESCRIPTIVE NOTES (Type of report and inclusive detect) Technical Memorandum 3/67			3.	
5. AUTNORISI (First name, middle initial, faet name)				
B. H. Morgan			a de la companya de l	
6. REPORT DATE	74. TOTAL NO. OF	PAGES	76. NO. OF REFS	
February 1967	. 9		3	
MA. CONTRACT OR GRANT NO.	SE. ORIGINATOR'S	REPORT NUM	SER(8)	
& PROJECT NO.	Report 3/67			
c.	90. OTHER REPOR	T NO(8) (Any o	ther numbers that may be assigned	
d.	Assignm	ent 91	195	
10. DISTRIBUTION STATEMENT				
Distribution of this document is	-			
II. SUPPLEMENTARY NOTES	12. SPONSORING A	HLITARY ACTI	AIÍA	
	NAVSEC			
A spectral distribution curve of over the range of 0.3 to 15.0 microwas developed from data compiled by solar irradiance measurements report atmosphere transmission measurement in 1951.	ons, is pr y Moon in rted by Jo	esented 1940, h hnson i	. This curve igh altitude in 1954, and	
DD FORM 1473 (PAGE 1)	Ţ	Inclassi	fied The SON COL	

Security Classification

S/N 0101-607-6801

Security Classification	Unclassified

4. KEY WORDS			40	* " **	LINI	C A	LINK B		LINKC	
10 mm	The state of the s			ROLE WT		ROLE	WT	ROLE	WT	
olar radiation		,		•						
olar irradiance										
olar irradiance tmosphere transm	nission				1 1					
olar heating										
	100									
									Ì	
					1 1				1	
P									144	
ф.н					1 1					
w					1					
					ł l					
bo .										
					[]					
·								I		
]					
				55						
					1					
					l i					

DD 100 1473 (BACK)
(PAGE 2)

Unclassified

Security Classification



UNITED STATES NAVY MARINE ENGINEERING LABORATORY ANNAPOLIS, MARYLAND — 21402

IN REPLY REFER TO:

NP/96 0(911 BHM)
Assigt 91 195
Tech Memo 3/67

6 FEB1967

From: Commanding Officer and Director

To: Commander, Naval Ship Engineering Center (Code 6680)

Subj: MEL Technical Memorandum 3/67, Transmittal of

1. Transmitted herewith is MEL Technical Memorandum 3/67, A Compilation of Selected Data on Solar Radiation at Sea Level.

H. V. NUTT
By direction

Copy to: (See Distribution List, page ii)